
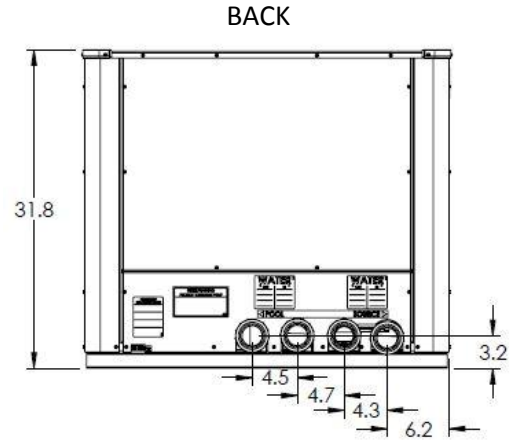


## Technical Data Sheet

### DIMENSIONS


(in inches)

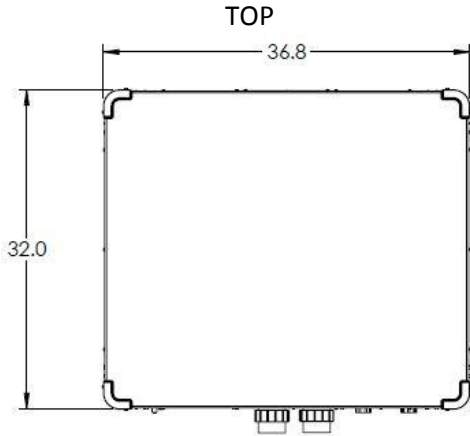

SPECIFICATIONS 10/17/2014			
Information	DATA		
TEST CONDITION (SOURCE/POOL/SOURCE GPM)	70/80/30	80/104/30	50/80/30
BTU OUTPUT	52,000	51,000	37,000
KW OUTPUT	15.2	14.9	10.8
COEFFICIENT OF PERFORMANCE	6.6	5.1	5.1
KW INPUT	2.3	2.9	2.1
VOLTAGE/Hz/PHASE	208-230/60/1		
MINIMUM CIRCUIT AMPACITY	18.4		
MAX FUSE	30		
COMPRESSOR TYPE	Reciprocating		
REGRIGERANT	R410A		
HEAT EXCHANGER	Thermolink 2 Pool Side/ Thermolink 2 Source Side		
WATER PRESSURE DROP	1.2 PSI (at 30 GPM Pool Side)	1.2 PSI (at 30 GPM Source Side)	
WATER FLOW	30-70 Min / Max (GPM Pool Side)	20-70 Min / Max (GPM Source Side)	
SHIPPING WEIGHT	320 pounds	146 kilograms	
DECIBELS	55 (at 10 feet)	55 (at 3 meters)	


Specifications are subject to change without notice.

#### CHARACTER POSITION NUMBER

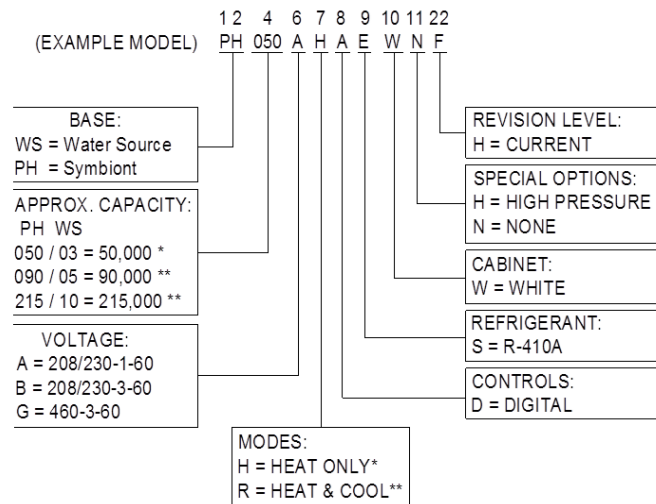

## Technical Data Sheet

### BTU OUTPUT CURVES AT 30 GPM SOURCE

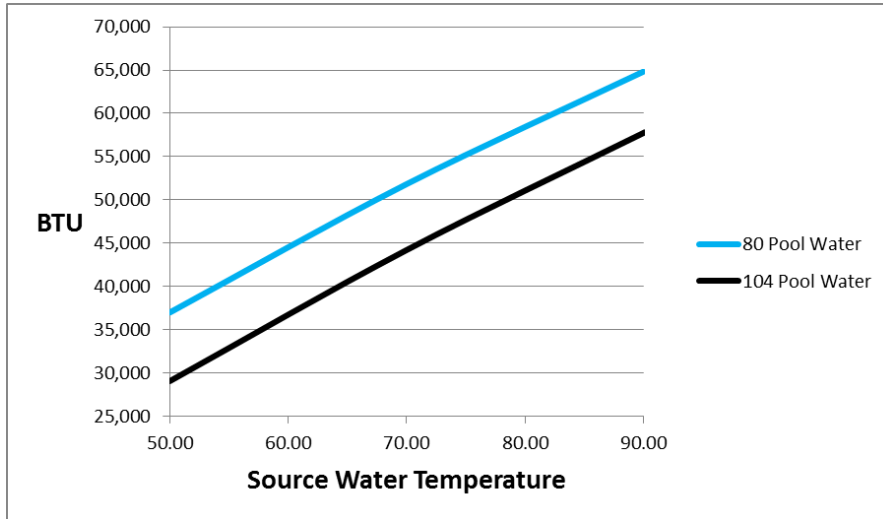

### COP OUTPUT CURVES AT 30 GPM SOURCE

